

표준소비효율(고효율) 배전용 변압기 Distribution Transformer

Ratings



Phase : Three, Single

Frequency: 50Hz, 60Hz

High Voltage: 22.9kV, 6.6kV, 3.3kV

Low Voltage: 220, 380, 440, 480, 220Y/127, 380Y/220, 400Y/230, 440Y/254, 480Y/277

Vector: Dd0, Dyn11, etc

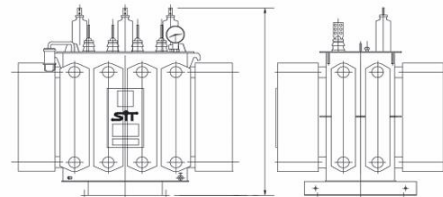

최저소비효율 (22900V - LV)

Capacity (Kva)	ξ (%)	ϵ (%)	I_o (%)	Dimensions(mm)			OIL (ℓ)	weight (kg)
				W	D	H		
1250	99.00	1.3	3.5	2020	1750	1840	1520	5000
1500	99	1.3	3.5	2020	1750	2000	1510	6400
2000	99.1	1.3	3.5	2210	2000	2000	1740	7400
2500	99.20	1.2	3.0	2280	2030	2120	1970	8500
3000	99.20	1.2	3.0	2340	2050	2230	2190	9600

최저소비효율 (6600V ~ 3300V - LV)

Capacity (Kva)	ξ (%)	ϵ (%)	I_o (%)	Dimensions(mm)			OIL (ℓ)	weight (kg)
				W	D	H		
1250	99.00	1.3	3.5	1950	2050	1750	1140	3330
1500	99.00	1.3	3.5	2000	2050	1810	1350	4250
2000	99.10	1.3	3.5	2270	2200	1890	1730	5940
2500	99.20	1.2	3.0	2380	2480	1890	1710	6030
3000	99.20	1.2	3.0	2400	2530	2090	1780	6180